


# Locking paths

- A = left closed - on top open
- B = right closed - on top open
- E = on top closed - left open
- F = on top closed - right open

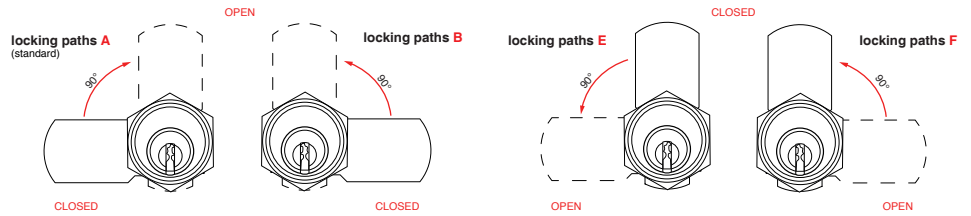

# Locking lever variants for EVVA lever cylinders

for locking path: E / F																	
<b>H73 [A]</b>			<b>H94 [A]</b>				<b>H88 [A]</b>										
A	26	<b>33</b>	36	40	45	50	A	33	<b>41</b>	59	A	<b>45</b>	65				
	55	60	65	70	75	80											
for locking path: A / B																	
<b>H72 [A]</b>			<b>H92 [A]</b>				<b>H87 [A]</b>										
A	18	26	27	<b>33</b>	37	40	45	50	A	<b>41</b>	48	52	A	33	40	<b>45</b>	65
	55	60	65	70	75	80	85										
<b>H91 [A]</b>					<b>RENZ HB [A] [B]</b>					<p>If nothing else is desired, we order the standard dimension of the locking lever length „A“ (marked blue).                      If you need a different length, give please indicate this in the order process in the order comments on.</p>							
A	<b>39</b>	59	65		A	22	<b>22</b>	22	28		28	B	14	<b>17</b>	22	17	22